




Built-In Cut Out Dimensions

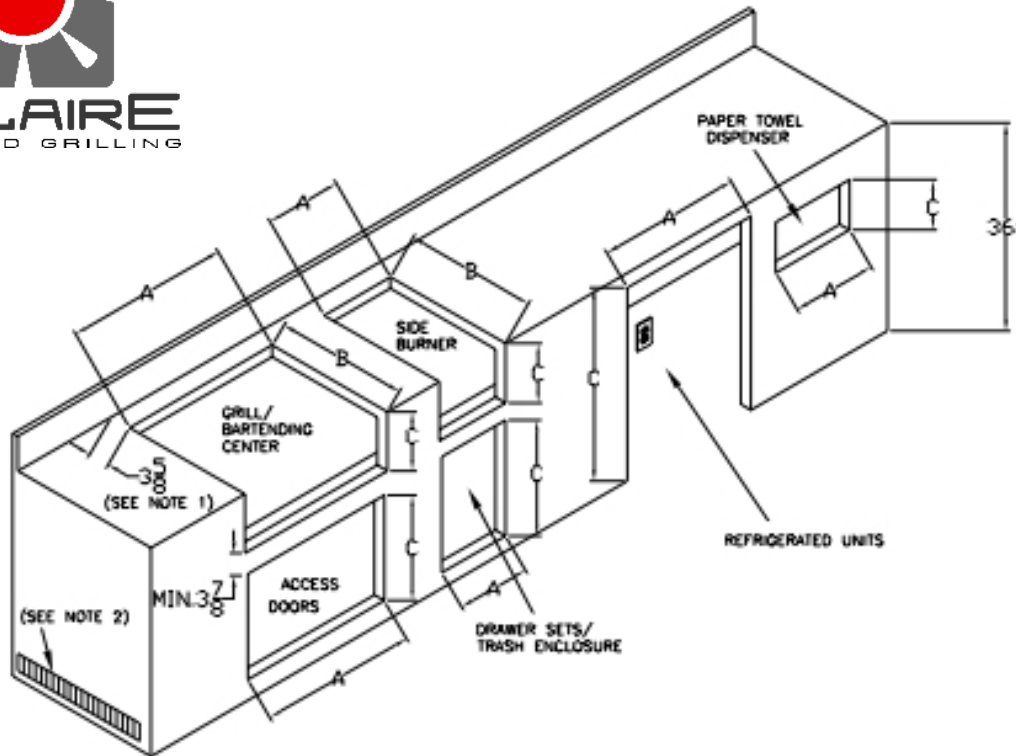

Model #	Product	Width			Depth			Height		
		A	B	C	A	B	C	A	B	C
IRBQ-15	15" Grill	14 1/2"	16 3/4"	9 5/8"						
IRBQ-21	21" Grill	20"	16 1/4"	7 7/8"						
IRBQ-21XL	21XL Grill	20"	21"	7 7/8"						
AGBQ-27	27" Grill	26"	16 1/4"	8 7/8"						
AG/IRBQ-27XL	27XL Grill	26"	21"	8 7/8"						
AG/IRBQ-30	30" Grill	28 1/2"	23"	10 1/4"						
AG/IRBQ-36	36" Grill	34 1/2"	23"	10 1/4"						
AG/IRBQ-42	42" Grill	40 1/2"	23"	10 1/4"						
AGBQ-56	56" Grill	54 1/2"	23"	10 1/4"						
IRIJ-21	21" Insulated Jacket	25 3/8"	17 11/16"	9"						
IRIJ-21XL	21XL Insulated Jacket	25 3/8"	22 9/16"	9"						
IRIJ-27	27" Insulated Jacket	31 3/8"	17 11/16"	10"						
IRIJ-27XL	27XL Insulated Jacket	31 3/8"	22 9/16"	10"						
IRIJ-30	30" Insulated Jacket	35"	24 1/2"	11 1/4"						
IRIJ-36	36" Insulated Jacket	41"	24 1/2"	11 1/4"						
IRIJ-42	42" Insulated Jacket	47"	24 1/2"	11 1/4"						
IRIJ-56	56" Insulated Jacket	61"	24 1/2"	11 1/4"						
IRDT-24	Bartending Center	23 1/4"	23"	10 1/4"						
IRDT-30	Bartending Center	28 1/2"	23"	10 1/4"						
SSB-14	Single Side Burner	13 1/4"	13 1/4"	9"						
IRSB-14	Dual Side Burner	13 1/4"	23"	10 1/4"						
SPR7-OS	Refrigerator	24 1/2"	26"	34"						
SP6DS-2D-OS	2 Drawer Refrigerator	24 1/2"	26"	34"						
SP6DS-3D-OS	3 Drawer Refrigerator	24 1/2"	26"	34"						
SBC-490-OS	Refrigerated Beer Cooler	24 1/2"	26"	35"						
FMD/IRAD-21	21" Door	18 1/4"	-	18 1/4"						
FMD/IRAD-30	30" Doors	27 1/4"	-	18 1/4"						
FMD/IRAD-36	36" Doors	33 1/4"	-	18 1/4"						
FMD/IRAD-42	42" Doors	39 1/4"	-	18 1/4"						
UD26S	Single Drawer - Shallow	27 1/8"	15"	3 11/16"						

UD26D	Single Drawer – Deep	27 1/8"	23"	3 11/16"
2D14S	2 Drawer Narrow - Shallow	12 7/8"	15"	20 1/16"
2D14D	2 Drawer Narrow - Deep	12 7/8"	23"	20 1/16"
2D21S	2 Drawer Wide – Shallow	19 7/8"	15"	20 1/16"
2D21D	2 Drawer Wide – Deep	19 7/8"	23"	20 1/16"
3D14S	3 Drawer Narrow – Shallow	12 7/8"	15"	20 1/16"
3D14D	3 Drawer Narrow – Deep	12 7/8"	23"	20 1/16"
3D21S	3 Drawer Wide – Shallow	19 7/8"	15"	20 1/16"
3D21D	3 Drawer Wide – Deep	19 7/8"	23"	20 1/16"
PTH1	Paper Towel Holder	14 7/8"	8"	8 3/4"
TRE1	Trash Enclosure	12 7/8"	19"	20 1/16"

Note 1: Min. 3 5/8" clearance required between edge of cutout and inside back wall of enclosure for gas regulator.

Note 2: Ventilation of island should be in accordance with local codes or accepted practice.


SPECIAL NOTE: Grill installation into combustible enclosure

requires insulated jacket. Order part #SOL-IRIJ-XX, where "XX" is the size of the grill in inches.

NATURAL GAS SUPPLY NOTE: A standard 3/8" ID flexible natural gas supply hose has a maximum capacity of 60,000 BTUs and should be used with 27" and 30" grills only. A 1/2" ID natural gas supply hose is required for larger models, or for 30" grills with a side burner. The proper hose is available from Solaire, order part #SOL-12HOSE12.

Detail for Flush Mounting

If the countertop of your island overhangs the cabinet face, the countertop must be notched to accommodate the control panel or front of the Solaire equipment.

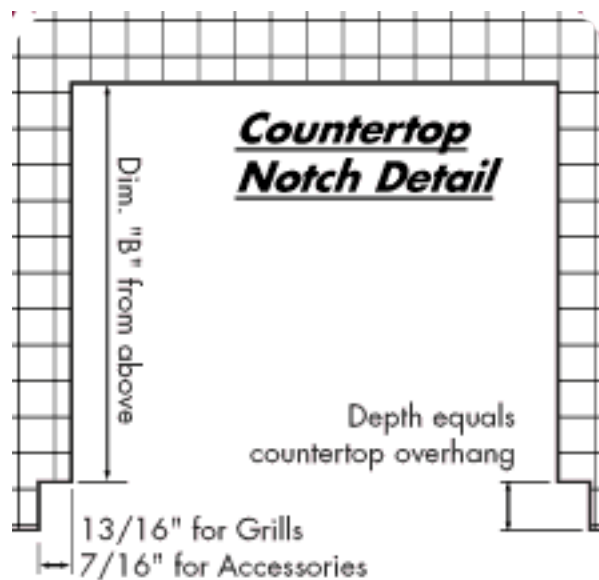

Rasmussen Iron Works, Inc.

12028 E. Philadelphia St. Whittier, CA 90601 U.S.A.
 (562) 696-8718 FAX: (562) 698-3510
 info@rasmussen.biz www.rasmussen.biz

Quality Products Since 1907