


42" SEE-THROUGH VENT FREE

ANSI Z21.91 COMPLIANT

PRODUCT DIMENSIONS

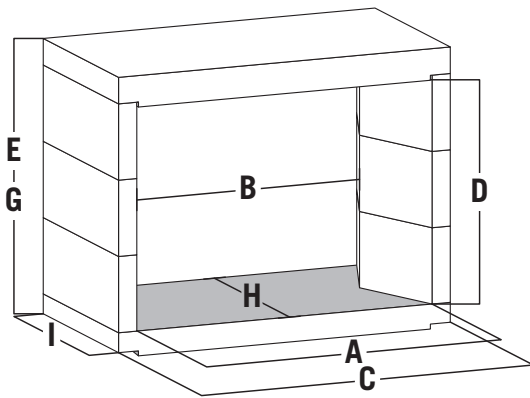

| | | | |
|---------------|---|---------------|--------|
| WIDTH | A | OPENING | 44.5" |
| | B | FIREBOX REAR | 34" |
| | C | OVERALL | 50" |
| HEIGHT | D | OPENING | 34.5" |
| | E | FIREBOX | 42.25" |
| | F | SMOKE CHAMBER | N/A |
| | G | OVERALL | 42.25" |
| DEPTH | H | FIREBOX | 28.5" |
| | I | OVERALL | 28.5" |
| DAMPER | | SIZE | N/A |
| WEIGHT | UNIT: 1,500 LBS INSTALL KIT: 700 LBS | | |


All measurements listed are based on dry stack units before firebrick is installed.

Dimensions are nominal and are given for design and framing reference only.

Please consult the manufacturer's installation manual for all details and requirements before making a final design layout decisions.

RECOMMENDED FRAMING DIMENSIONS


Dimensions add 0.5" of air space to the required clearances

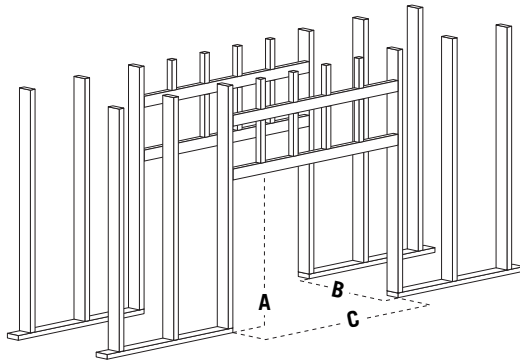

| A* | B | C |
|-----------|----------|----------|
| 45.25" | N/A | 51" |

* It is recommended to not install framing header until after firebox is installed.

CLEARANCE TO COMBUSTIBLES



- OPENING TO SIDEWALL: 6"
- OPENING TO MANTLE WITH 8" DEPTH: 12"
- FIREBOX & SMOKE CHAMBER TO COMBUSTIBLES OR FRAMING: 0"


The front surface at the bottom and sides must be covered with noncombustible material. The top surface must be covered with a noncombustible material that extends 3" above the top of the surface.

AVAILABLE ACCESSORIES


- FireRock Adhesive Mortar (MANDATORY)
- Firebrick
- Installation Kit




FR0442 - FIREROCK 42" SEE-THROUGH VENT FREE
APPROVED FOR INDOOR & OUTDOOR USE

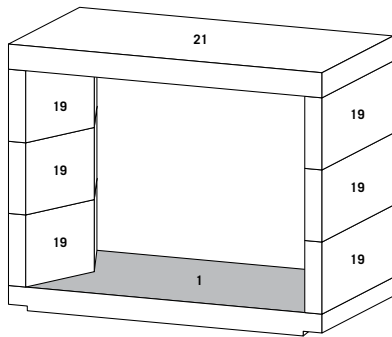


ISOMETRIC




SECTION A-A

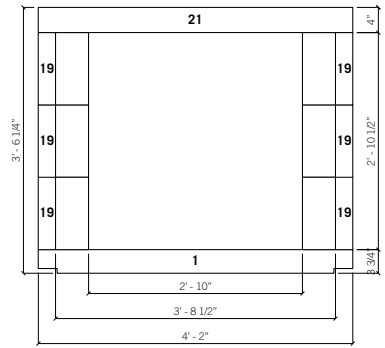


FRONT ELEVATION

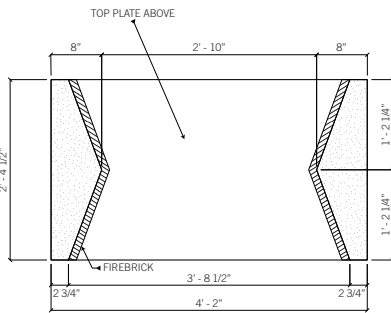

FIREBOX PLAN

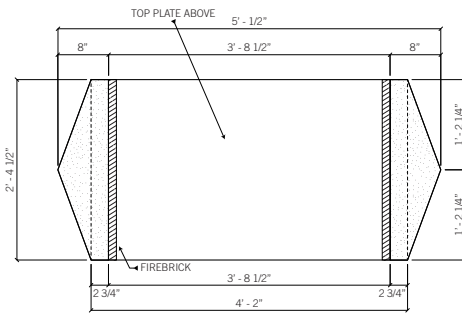

FIREBOX PLAN - ALT

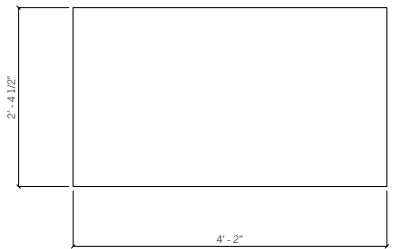

TOP PLAN

| # | COMPONENT NAME | # | COMPONENT NAME |
|----|--------------------------|---|----------------|
| 1 | BASE PLATE | | |
| 19 | SEE-THROUGH FIREBOX SIDE | | |
| 21 | TOP PLATE | | |
| | | | |
| | | | |
| | | | |
| | | | |

*NOTE: All pieces subject to a 1/8" tolerance