




# CRYSTAL FIRE® PLUS LINEAR ELECTRONIC IGNITION GAS FIRE PIT BURNER

42" X 12"

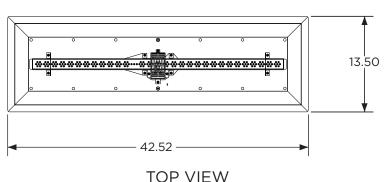



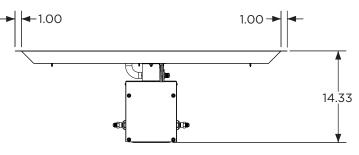

1.00 1.00

FRONT VIEW

RIGHT VIEW

ITEM CODE	BTU/hr.	FIRE MEDIA	LENGTH (in.) Packaged	WIDTH (in.) Packaged	HEIGHT (in.) Packaged	WEIGHT(lbs.) Packaged
CFP1242DSING-B	80,000	20 lbs.	46	16	16	47
CFP1242DSILP-B	80,000	20 lbs.	46	16	16	47

# **Technical Specifications:**

- CLEARANCE TO COMBUSTIBLES
  - 72" from top of burner to any overhead combustible material. 24" from edge of burner trim to any combustible side wall materials. 4" from bottom of burner to combustible floor materials.

### 2. GAS SUPPLY

- Natural Gas Operating Supply Pressure: Min 6" WC; Max 10.5" WC; IDEAL 7" WC
- Liquid Propane Operating Supply Pressure: Min 8" WC; Max 14" WC; IDEAL 11" WC

#### 3. ELECTRICAL REQUIREMENTS

• Readily accessible GFCI-protected outlet installed within enclosure to local or national electrical code. Weatherproof-while-in-use cover should be installed on junction box. (CF-DSI-JB is recommended)

## 4. CONTROLS

- Included: Low-voltage three-position control switch and control panel for installation on enclosure.
- Optional (Low-Voltage): 4-hour timer (4HRTC) for installation on enclosure, RF remote (CF-DSI-R)
- Optional (110VAC): E-Stop (CF-ESO-CP), wall switch/E-stop combination (WSES-CP), 4-hour timer/E-stop combination (4HTES-CP). All 110VAC controls intended to control outlet to which appliance is connected.

#### 5. LISTING

- Standard: ANSI Z21.97-2017/CSA 2.41-2017 Outdoor Decorative Gas Appliances
- Testing Agency: Underwriters Laboratories (UL LLC)

Included Items: Switch bypass (CF-DSI-SB), control panel (CF-DSI-CP), 110VAC/3.3 VDC transformer (OGR-3V-ADP), standard fire media (CFG-D), 10' regulator hose (CF-HOSE-REG)

Optional Items: Tempered glass burner cover (1242GGC), stainless steel burner cover (SS1242BC), tempered glass wind guard (GG-1242), folding glass wind guard (FWG-1242), additional media options