
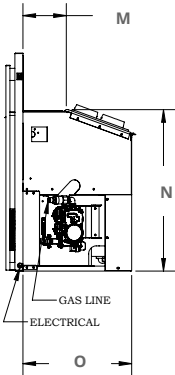
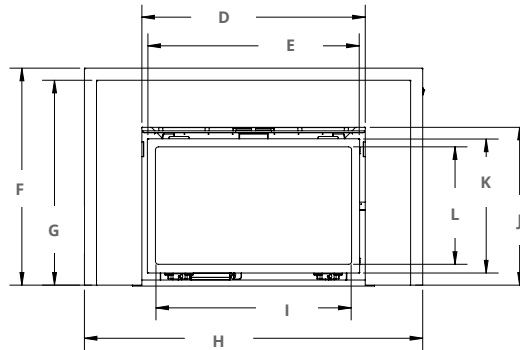


CO-LINEAR GAS INSERT

DIMENSIONS

PART	ACTUAL	FRAMING
FRONT WIDTH	29½"	N/A
BACK WIDTH	19"	N/A
HEIGHT	20"	N/A
DEPTH	13½"	N/A
VIEWING AREA	24¼" X 14½"	N/A

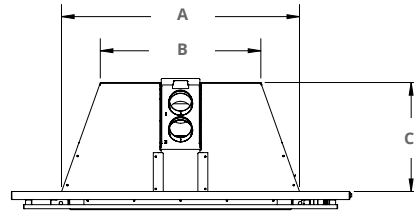

I SERIES STANDARD TRIM DIMENSIONS

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
30FID	29½"	19"	13½"	27¾"	26¼"	26⅞"	25¾"	42"	24¼"	19½"	16⅝"	14½"	5¾"	20"	13½"

Dimensions shown with standard trim, see manual for dimensions with oversized and four sided surround

FEATURES

- Highly efficient firebox design
- Hidden pilot design
- Decorative faceplate
- Black rectangular door with ceramic glass

Models	P4.1		AFUE	
	NG	LP	NG	LP
30FID-S	79%	80%	71%	73%
30FID-L	78%	79%	71%	73%
34FID-S	81%	82%	71%	71%
34FID-L	77%	79%	70%	71%

TECHNICAL SPECIFICATIONS

Linear standard with:

- Integrated door screen
- Snap-lock door for access to the firebox
- Remote flame adjustment
- Remote control operation
- Battery backup for continuous operation
- 24,000 BTU Concealed ribbon burner, in-burner accent lighting, porcelain panels

Linear FID Options:

- Conversion kit
- Driftwood logset and speckled stones

Traditional standard with:

- Integrated door screen
- Snap-lock door for access to the firebox
- Remote flame adjustment
- Remote control operation
- Battery backup for continuous operation
- 24,000 BTU Ceramic burner, accent lighting

Traditional FID Options:

- Conversion kit
- Various brick and porcelain refractory

