SPEC SHEET

Distinction

D7215

MONTIGO®

LINEAR GAS FIREPLACE

PART	ACTUAL	FRAMING
FRONT WIDTH	87⅞"	95¾"
BACK WIDTH	87⅞"	95¾"
HEIGHT	43⅛"	59 ⅜"
DEPTH	18 ⅜"	18 ½"
VIEWING AREA	73⅞" X 15½"	N/A

DIMENSIONS

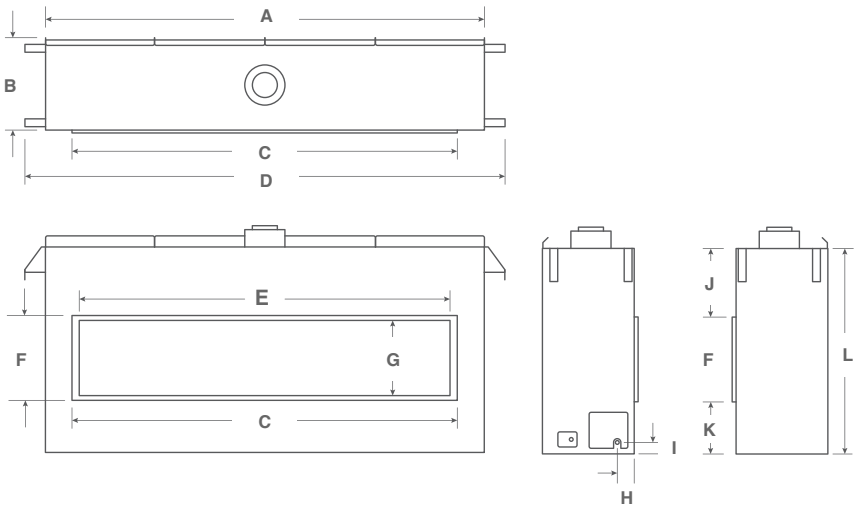

D7215 SINGLE SIDED DIMENSIONS

A	B	C	D	E	F	G	H	I	J	K	L
87⅞	18⅜	76¾	95¹¹⁄₁₆	73⅞	17	15½	5½	2⅜	13⅝	10⅜	41

FEATURES

- 18½" Framing Depth
- Montigo 4th generation 57,000 BTU/HR concealed linear burner
- Standard 5/8 direct vent
- Field convertible to propane with optional conversion kit
- Heat distribution kits for secondary heating

TECHNICAL SPECIFICATIONS

D7215 standard with:

- Full load Proflame2 control system and full function remote control
- 57,000 BTU/HR NG or LP Montigo 4TH generation linear concealed burner
- 30% turn down gas valve with steppermotor
- Ceramic glass door with flush safety screen
- Quiet circulating fans with remote speed adjustment
- Ceramic glass reflective liner kit
- Multicolor LED uplighting with remote control
- Ice fireglass media
- Metal header and cementboard facing

D7215 Options:

- Cool Wall Advantage TV kit
- Cool Wall Advantage side discharge kit
- Speckled stones, driftwood logset

SPEC SHEET

Distinction

D7215

MONTIGO®

LINEAR GAS FIREPLACE

FRAMING SPECIFICATIONS

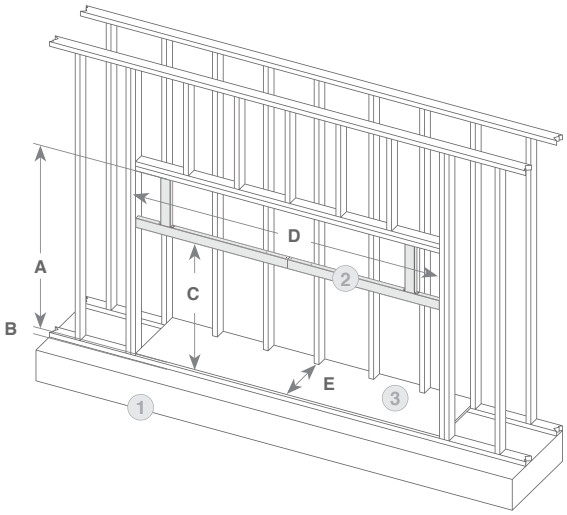

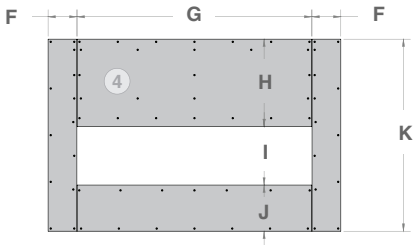

1	Floor structure
2	Metal header
3	Fireplace platform
4	Concrete board

D7215 SINGLE SIDED DIMENSIONS

A	B	C	D	E	F	G	H	I	J	K
59 3/8	2 1/4	41 1/16	95 3/4	18 1/2	10 7/8	76 7/8	33 7/16	17 1/8	12 9/16	63 1/8

SPECIFICATIONS

The perfect combination of performance and design

- Sides: 4″
- Back: ⅛″
- Top : 18 ⅜″
- Floor: 0″
- Facing Material: Cement board (Supplied)

	BTU		Efficiency	
Unit Code	High	Low	P.4. 1-02	Steady state
D7215NI	57,000	39,000	> 63%	> 70%
D7215LI	57,000	46,000	> 63%	> 70%