



15" Signature Series Beverage Center

Model Nos. HP15BS-1L HP15BS-2L HP15BS-3L HP15BS-4L
 HP15BO-1L HP15BO-2L HP15BO-3L HP15BO-4L

**also available with right hinge*

Job _____
Area _____
Item No. _____
Model No. _____



HP15BS-1R



HP15BS-3L



Features

- Designed with fully-integrated depth to allow flush fit with surrounding cabinetry
- Zero-clearance hinging allows for abutment with surrounding cabinetry
- With 3/4" wood overlay, the unit will stand flush with cabinetry
- Best in class 700 Btu commercial grade compressor
- Front-vented, forced-air refrigeration system
- **Industry Exclusive** commercial grade stainless steel interior in 15" units
- **Industry Exclusive** convertible door design allows all doors the ability to be converted to wood overlay from stainless steel
- Low E, UV coated glass provides industry leading insulation and protection
- Whisper quiet performance allows unit to be used in any room of a residence or office
- Door locks available

Beverage Center Features

- Allows for storage of both wine and beverages
- Two (2) wine shelves, one (1) industry exclusive full extension pullout shelf
- Shelving positions are adjustable to suit your needs
- Beverage Center temperature 36°- 48° F
- Indoor/outdoor rated models

Luxury YOU DESIRE
INNOVATION YOU CAN'T LIVE WITHOUT

Form No.080210
Rev. 07.07.2011



8300 W. Good Hope Rd. • Milwaukee, WI 53223
1-800-558-5592 • Fax: (414) 353-7069 • perlick.com


Perlick is committed to continuous improvement. Therefore, we reserve the right to change specifications without warning.

15" Signature Series Beverage Center

Indoor Models	Outdoor Models	Beverage Center
HP15BS-1L	HP15BO-1L	15" Beverage Center with solid stainless steel door hinge left
HP15BS-2L	HP15BO-2L	15" Beverage Center with integrated solid wood overlay door hinge left
HP15BS-3L	HP15BO-3L	15" Beverage Center with stainless steel glass door hinge left
HP15BS-4L	HP15BO-4L	15" Beverage Center with integrated wood overlay glass door hinge left

**Also available with right hinge*

Overall Width	14-7/8", 37.783 cm	Door Swing Clearance	16"
Overall Height	34-1/4", 86.96 cm	Annual Energy Usage	313 kWh/yr
Overall Depth	24", 60.96 cm	Electrical:	115V, 60 Hz, 1 phase AC, 2.3 amps
Capacity	3.0 cubic ft.	Plumbing:	none required
Min. Height Req.	34-3/8"	Shipping Weight:	175 lbs.

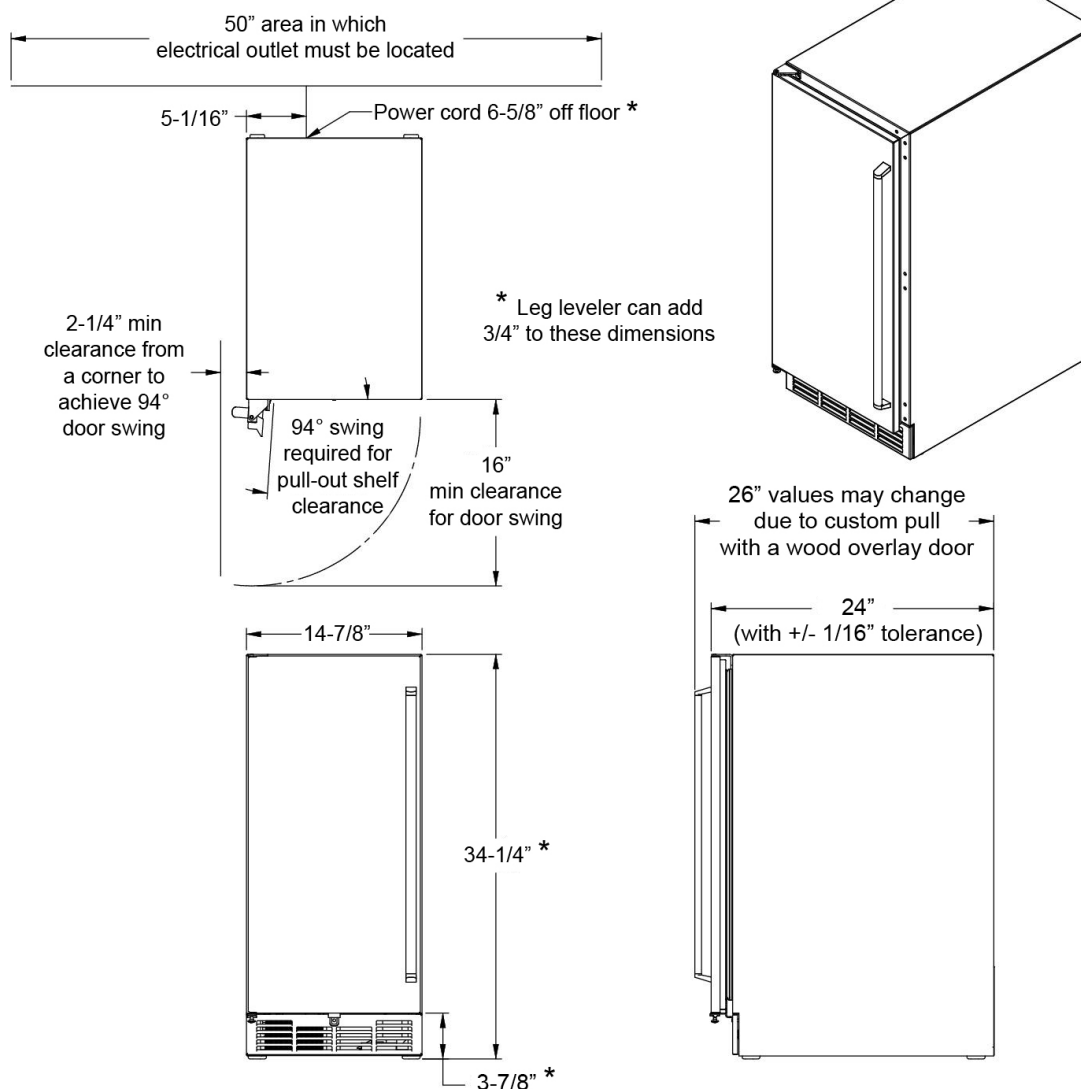

Form No.080210
Rev. 07.07.2011



8300 W. Good Hope Rd. • Milwaukee, WI 53223
1-800-558-5592 • Fax: (414) 353-7069 • perlick.com

Perlick is committed to continuous improvement. Therefore, we reserve the right to change specifications without warning.