



15" Signature Series Beer Dispenser

Model Nos. HP15TS-1L HP15TS-2L HP15TO-1L HP15TO-2L

* Also available with right hinge

Job _____
Area _____
Item No. _____
Model No. _____



HP15TS-1R



Features

- Designed with fully-integrated depth to allow flush fit with surrounding cabinetry
- Zero-clearance hinging allows for abutment with surrounding cabinetry
- With 3/4" wood overlay, the unit will stand flush with cabinetry
- Best in class 700 Btu commercial grade compressor
- Front-vented, forced-air refrigeration system
- **Industry Exclusive** commercial grade stainless steel interior in 15" units
- **Industry Exclusive** Convertible Door Design allows all doors the ability to be converted to wood overlay from stainless steel
- Low E, UV coated glass provides industry leading insulation and protection
- Whisper quiet performance allows unit to be used in any room of a residence or office
- Door locks available

Beer Dispenser Features

- Refrigeration system keeps beer at perfect serving temp
- Complete, self-contained beer system
- Portable drainer, no plumbing required
- Will hold one 1/6 pony keg
- Indoor/outdoor rated models
- Faucet locks available
- Beer Dispenser temperature 33° - 39° F

Luxury YOU DESIRE
INNOVATION YOU CAN'T LIVE WITHOUT

Form No.080210
Rev. 07.06.2011



8300 W. Good Hope Rd. • Milwaukee, WI 53223
1-800-558-5592 • Fax: (414) 353-7069 • perlick.com


Perlick is committed to continuous improvement. Therefore, we reserve the right to change specifications without warning.

15" Signature Series Beer Dispenser

Indoor Models	Outdoor Models	Beer Dispenser
HP15TS-1L	HP15TO-1L	15" Beer Dispenser with solid stainless steel door hinge left, single faucet tower
HP15TS-2L	HP15TO-2L	15" Beer Dispenser with integrated solid wood overlay door hinge left, single faucet tower

* Also available with right hinge

Overall Width	14-7/8", 37.783 cm	Door Swing Clearance	16"
Overall Height	34-1/4", 86.96 cm	Annual Energy Usage	313 kWh/yr
Overall Depth	24", 60.96 cm	Electrical:	115V. 60 Hz, 1 phase AC, 2.3 amps
Capacity	3.0 cubic ft.	Plumbing:	none required
Min. Height Req.	34-3/8"	Shipping Weight:	175 lbs.

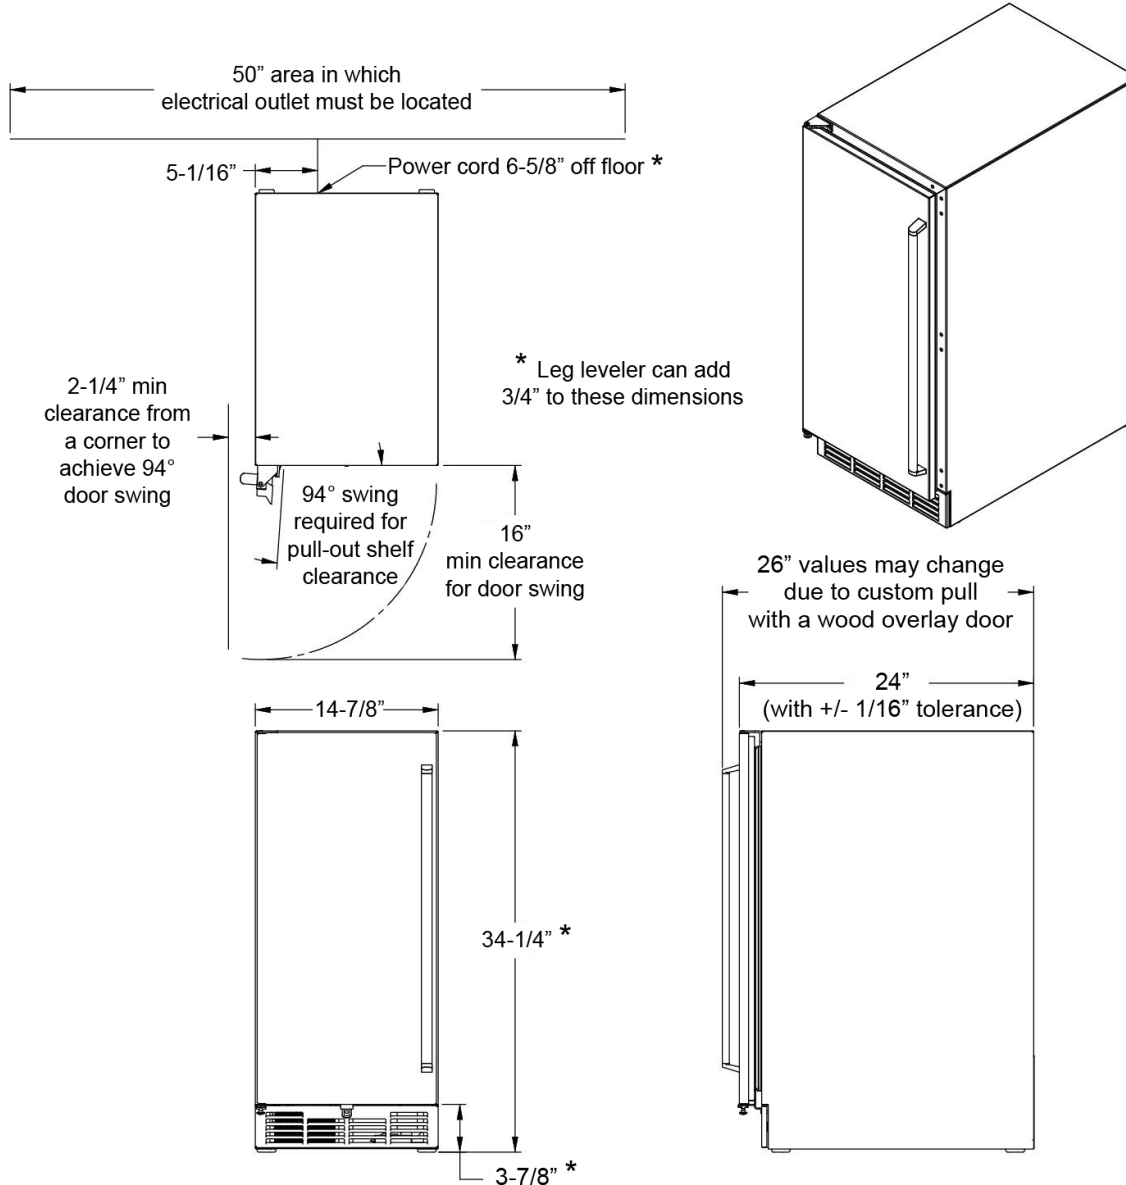

Form No.080210
Rev. 07.06.2011



8300 W. Good Hope Rd. • Milwaukee, WI 53223
1-800-558-5592 • Fax: (414) 353-7069 • perlick.com

Perlick is committed to continuous improvement. Therefore, we reserve the right to change specifications without warning.