UL 127 & ANSI Z21.60 COMPLIANT

PRODUCT DIMENSIONS W All me Dimen

WIDTH	Α	OPENING	50.5"
	В	FIREBOX REAR	40"
	С	OVERALL	56"
HEIGHT	D	OPENING	34.5"
	E	FIREBOX	38.25"
	F	SMOKE CHAMBER	40.75"
	G	OVERALL	79"
DEPTH	Н	FIREBOX	28.5"
	ı	OVERALL	28.5"
DAMPER		SIZE	TOP SEAL

All measurements listed are based on dry stack units before firebrick is installed.

UNIT: 2,350 LBS


INSTALL KIT: 850 LBS

Dimensions are nominal and are given for design and framing reference only.

Please consult the manufacturer's installation manual for all details and requirements before making a final design layout decisions.

RECOMMENDED FRAMING DIMENSIONS Dimensions add 0.5" of air space to the required clearances A* B C 48.4375" N/A 59" * It is recommended to not install framing header until after firebox is installed.

CLEARANCE TO COMBUSTIBLES



• OPENING TO SIDEWALL: 28"


WEIGHT

- OPENING TO COMBUSTIBLE TRIM: 12"
- OPENING TO MANTLE WITH 8" DEPTH: 30"
- NONCOMBUSTIBLE HEARTH EXTENSION: 20" front; 8" each side
- FIREBOX & SMOKE CHAMBER TO COMBUSTIBLES OR FRAMING: $1^{\prime\prime}$
- SMOKE CHAMBER (FRONT WALL & TOP) TO WOOD FRAMING: $1^{\prime\prime}$

AVAILABLE ACCESSORIES

- FireRock Adhesive Mortar (MANDATORY)
- Solid Block Chimney
- · Offset Block
- Brick Flange
- Firebrick
- Crown Cap
- · Outside Air Kit
- Installation Kit
- Top Seal Damper
- · Log Lighter
- · LiteRock Riser

UL 103 Metal Chimney (14")

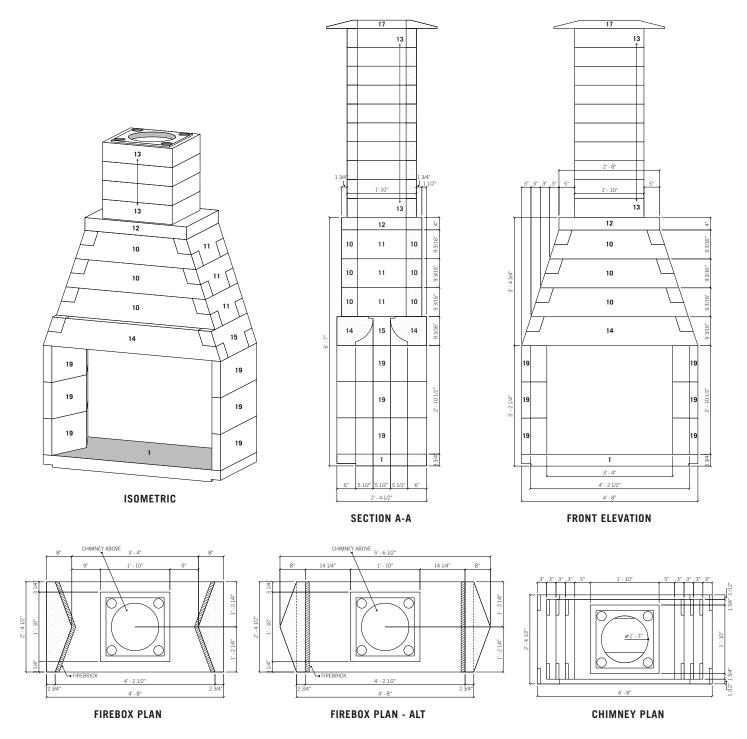

#	COMPONENT NAME
1	BASE PLATE
10	SMOKE CHAMBER FRONT AND BACK
11	UNIVERSAL SMOKE CHAMBER SIDES
12	CHIMNEY BASE
13	CHIMNEY BLOCK
14	RADIUS THROAT
15	SEE-THROUGH THROAT SIDE

#	COMPONENT NAME
17	LARGE CROWN CAP
19	SEE-THROUGH FIREBOX SIDE