




Please consult the manufacturer's installation manual for all details and requirements before making a final design layout decision.


Triton 78"
Electric Fireplace

MODEL	WIDTH		HEIGHT		DEPTH		VIEWING AREA (A x D)
	Actual (A)	Framing	Actual (B)	Framing	Actual (C)	Framing	
SF-TR78	78-5/16" [2002]	78-9/16" [1996]	26-11/16 [678]	27-3/16" [691]	12-7/16" [316]	12-15/16" [329]	78-5/16" x 20" [2002 x 508]

FRONT

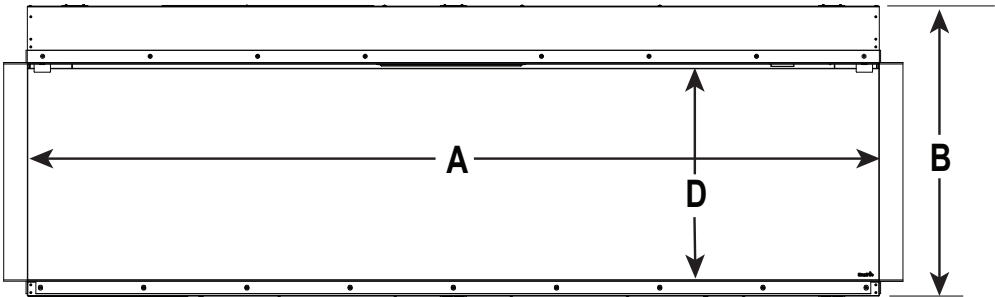


RIGHT SIDE

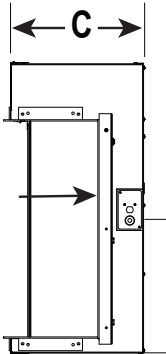


ELECTRICAL CONNECTION REQUIREMENTS

CIRCUIT	CONNECTION METHOD	BTUS
15 AMP, 120V/60 Hz/1400W	Hardwire only	5,000
20 AMP, 240V/60 Hz/2800W	Hardwire only	10,000

INSTALLATION OPTIONS

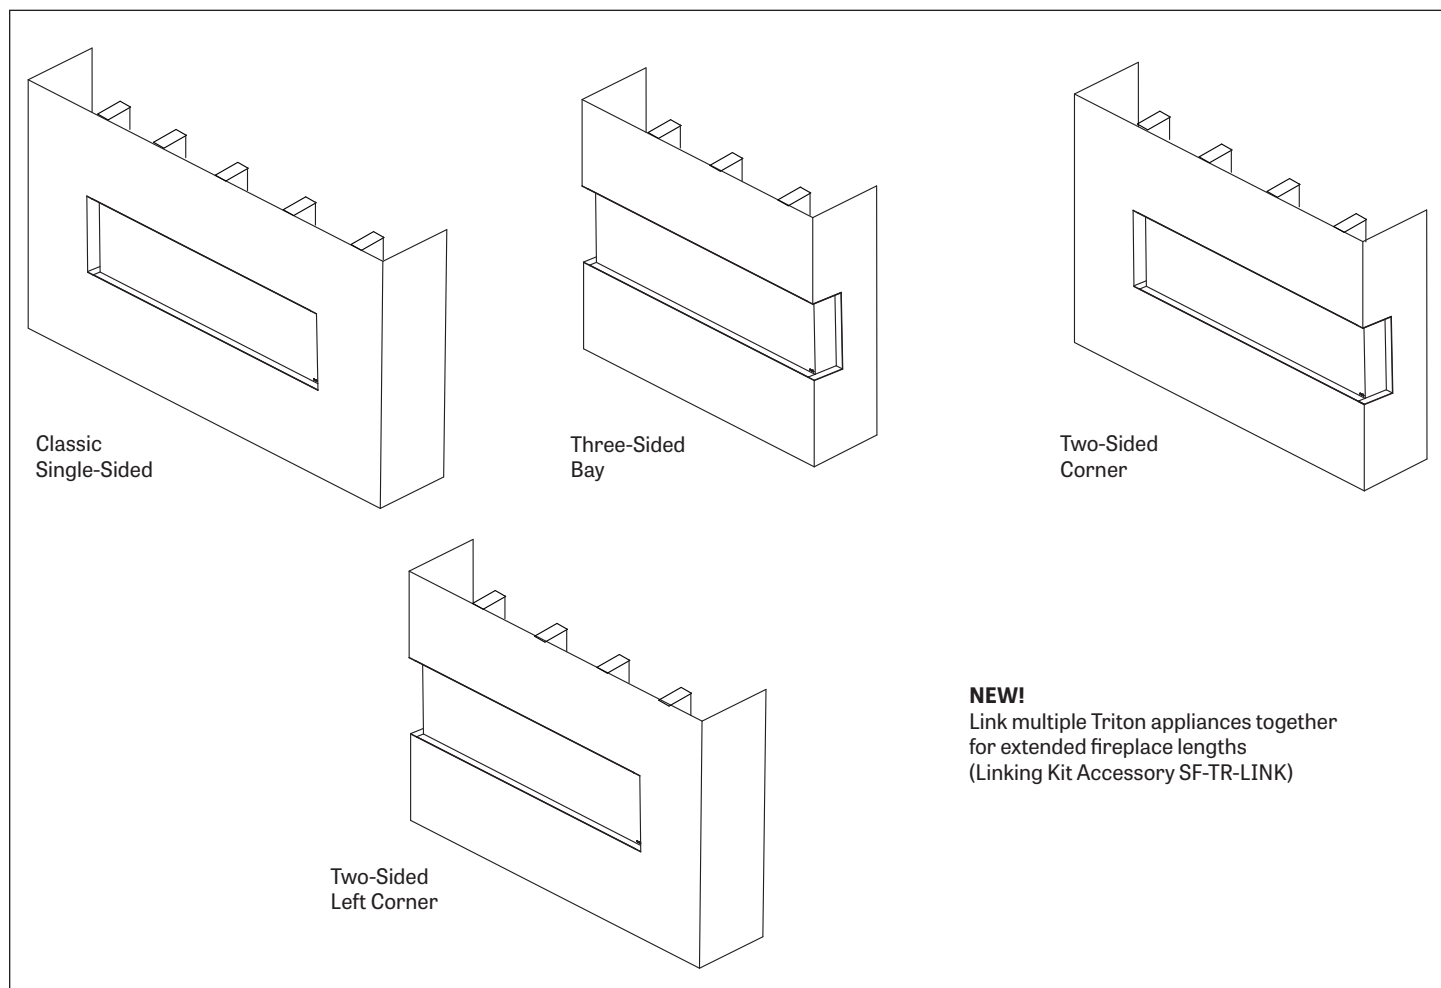

APPLIANCE LOCATION

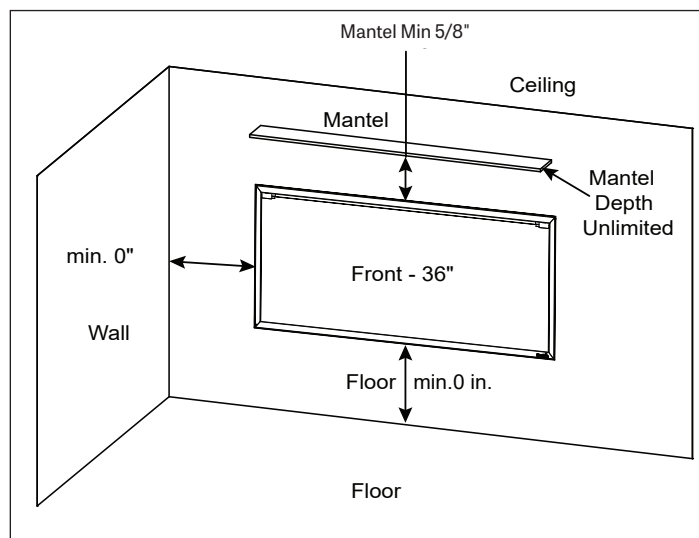

MINIMUM CLEARANCES TO COMBUSTIBLES

AREA	CLEARANCES
SIDES	0"
FLOOR	0"
TOP TO MANTEL	5/8"
BACK	0"
FRONT	36" [914]

APPLIANCE CERTIFICATION

MODEL: SF-TR78

LABORATORY: CSA International and Underwriters Laboratories, Inc (UL)

TYPE: Electric Air-Heaters; Fixed and Location-Dedicated Electric Room Heaters

STANDARD: CSA C22.2 No 46-13; UL 2021 (4th Edition)

Product information provided is not complete and is subject to change without notice. Product installation must adhere strictly to instructions accompanying product to avoid risk of fire and potential injury.